

ELECTRONIC HIGH FREQUENCY VIBRATOR



EVO

- Needle diameter mm 36, 50, 60
- 2 bearings
- Protection on the needle IP 67

EVO-P

- Needle diameter mm 50, 57, 65
- 4 bearings
- Protection on the needle IP 67
- Suitable for heavy duty use and large areas

ELECTRONIC CONVERTER


- » Tropicalized and resined electronic board.
- » Start and stop.
- » Protection on the board IP67.

Protections against:

- shortcircuit
- overload
- higher and lower tension
- overtemperature

MAIN ADVANTAGES:

> available on stock > high reliability > high performance > no maintenance > easy to handle

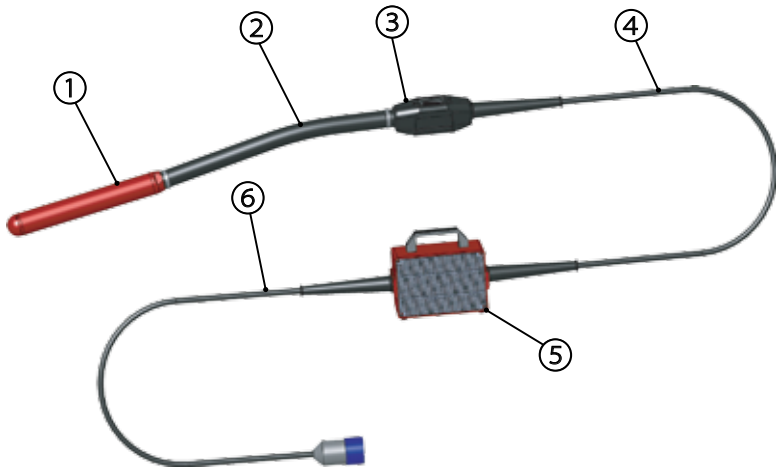

POS.	DESCRIPTION
①	VIBRATING NEEDLE
②	5m RUBBER HOSE
③	SWITCH
④	10m SUPPLY CABLE
⑤	ELECTRONIC CONVERTER
⑥	2m SUPPLY CABLE

Rights reserved to modify technical specifications

ELECTRONIC HIGH FREQUENCY VIBRATOR											
TYPE	Ø NEEDLE (mm)	NEEDLE LENGTH (mm)	INPUT VOLTAGE (V)	OUTPUT VOLTAGE (V)	INPUT FREQUENCY (Hz)	OUTPUT FREQUENCY (Hz)	VIBRATIONS (Rpm)	CENTRIFUGAL FORCE (Kg)	CURRENT (A)	INPUT POWER (Kw)	TOTAL WEIGHT (Kg)
EVO 36	36	350	180 ÷ 260 1 Ph	230 3 Ph	50 - 60	200	12000	135	3,0	1,0	12
EVO 50	50	360						300	3,8	1,2	17
EVO 60	60	365						460	4,5	1,4	18
EVO 50P	50	400						380	5,0	1,6	16
EVO 57P	57	442						575	6,0	1,9	18
EVO 65P	65	442						740	7,5	2,4	22

OTHER OLI® PRODUCTS:



OLI SpA is a leading manufacturer of electric poker vibrators for the compaction of concrete, external electric vibrators, uni-directional and rotational pneumatic vibrators, poker vibrators, converters, flow aids and fluidization and aeration systems for silos and hoppers.



OLI Vibrators

Factory 4, 3 Gatwick Road, Bayswater VIC 3153
 Phone: +61 3 8761 6911 Fax: +61 3 8761 6922
 E-mail: info@olivibrators.com.au
www.olivibrators.com.au