

ELECTRONIC HIGH FREQUENCY VIBRATOR



EWO

- Needle diameter mm 36, 50, 60
- 2 bearings
- Protection on the needle IP 68

EWO-P

- Needle diameter mm 50, 57, 65
- 4 bearings
- Protection on the needle IP 68
- Suitable for heavy duty use and large areas

ELECTRONIC CONVERTER


- » Tropicalized and resined electronic board.
- » Start and stop.
- » Protection on the board IP68.

Protections against:

- shortcircuit
- overload
- higher and lower tension
- overtemperature

MAIN ADVANTAGES:

> available on stock > high reliability > high performance > no maintenance > easy to handle

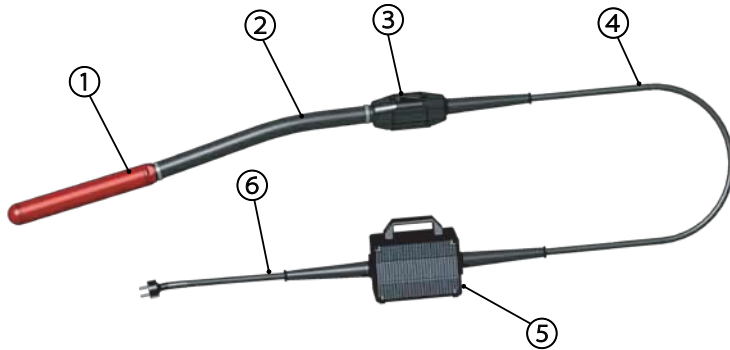

POS.	DESCRIPTION
①	VIBRATING NEEDLE
②	5m RUBBER HOSE
③	SWITCH
④	8m SUPPLY CABLE
⑤	ELECTRONIC CONVERTER
⑥	2m SUPPLY CABLE

Rights reserved to modify technical specifications

ELECTRONIC HIGH FREQUENCY VIBRATOR

TYPE	Ø NEEDLE	NEEDLE LENGHT	INPUT VOLTAGE	OUTPUT VOLTAGE	INPUT FREQUENCY	OUTPUT FREQUENCY	VIBRATIONS	CENTRIFUGAL FORCE	CURRENT	INPUT POWER	TOTAL WEIGHT
	(mm)	(mm)	(V)	(V)	(Hz)	(Hz)	(Rpm)	(Kg)	(A)	(Kw)	(Kg)
EW0 36	36	350	180 ÷ 260 1 Ph	230 3 Ph	50 - 60	200	12000	135	3,0	1,0	12
EW0 50	50	360						300	3,8	1,2	17
EW0 60	60	365						460	4,5	1,4	18
EW0 50P	50	400						380	5,0	1,6	18
EW0 57P	57	442						575	6,0	1,9	18,4
EW0 65P	65	442						740	7,5	2,4	20,4

OTHER OLI® PRODUCTS:



OLI SpA is a leading manufacturer of electric poker vibrators for the compaction of concrete, external electric vibrators, uni-directional and rotational pneumatic vibrators, poker vibrators, converters, flow aids and fluidization and aeration systems for silos and hoppers.